



BR40 (PAR38)
E26 / 24 (美規)



光束角度：120°



光束角度：60° / 72°




工作電壓 100 - 240V AC
重量 15.2 oz. (430 g)
環境溫度 -20°C to +40°C
使用壽命 40,000+ 小時
保固期限 2 年


BR40 (PAR38)
E26 / 27 (歐規)



光束角度：120°



光束角度：60° / 72°




工作電壓 100 - 240V AC
重量 15.2 oz. (430 g)
環境溫度 -20°C to +40°C
使用壽命 40,000+ 小時
保固期限 2 年

可另外加上 E39/E40 基座 (選配)



光束角度

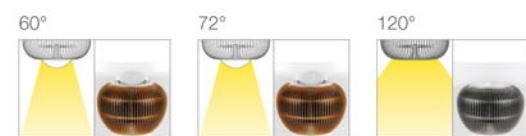

色光



正白光 自然白 暖白光





晶片光通量

所有晶片光通量數值皆以晶片製造商公佈為準



| | | |
|------|------------------|---------|
| 使用晶片 | BRIDGELUX | |
| 消耗功率 | 35 Watts | |
| 光束角度 | 60° / 72° / 120° | |
| 正白光 | CRI 65 | 2600 lm |
| 暖白光 | CRI 82 | 1560 lm |



| | | |
|------|------------------|---------|
| 使用晶片 | BRIDGELUX | |
| 消耗功率 | 20 Watts | |
| 光束角度 | 60° / 72° / 120° | |
| 正白光 | CRI 65 | 1320 lm |
| 自然白 | CRI 80 | 980 lm |
| 暖白光 | CRI 82 | 900 lm |



| | | |
|------|------------------|---------|
| 消耗功率 | 20 Watts | |
| 光束角度 | 60° / 72° / 120° | |
| 正白光 | CRI 70 | 1100 lm |
| | CRI 90 | 880 lm |
| 自然白 | CRI 70 | 900 lm |
| | CRI 90 | 720 lm |
| 暖白光 | CRI 70 | 740 lm |
| | CRI 90 | 600 lm |



| | | |
|------|------------------|--------|
| 消耗功率 | 15 Watts | |
| 光束角度 | 60° / 72° / 120° | |
| 正白光 | CRI 70 | 800 lm |
| | CRI 90 | 640 lm |
| 自然白 | CRI 70 | 650 lm |
| | CRI 90 | 520 lm |
| 暖白光 | CRI 70 | 520 lm |
| | CRI 90 | 420 lm |

