





照明燈
F01

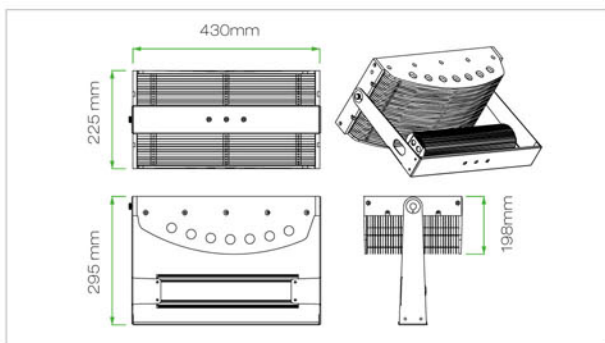

工作電壓 100 - 240V AC
 重量 9-11 kg
 環境溫度 -20°C to +50°C
 使用壽命 50,000+ 小時
 保固期限 2 年



配光曲線圖

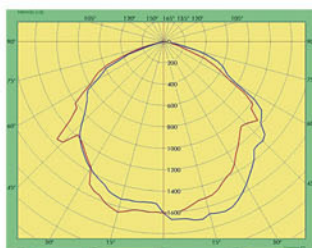

晶片光通量

所有晶片光通量數值皆以晶片製造商公佈為準


型號	F01-E80	
消耗功率	82 Watts	
光束角度	130°	
正白光	CRI 70	3800 lm
暖白光	CRI 70	2600 lm

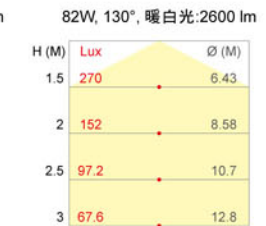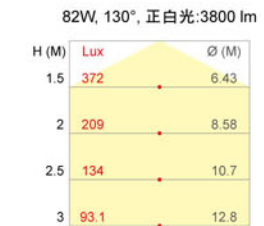

型號	F01-E120	
消耗功率	124 Watts	
光束角度	130°	
正白光	CRI 70	5700 lm
暖白光	CRI 70	3900 lm



型號	F01-E160	
消耗功率	166 Watts	
光束角度	130°	
正白光	CRI 70	7600 lm
暖白光	CRI 70	5200 lm

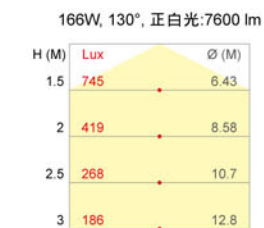



型號	F01-L60	
消耗功率	52 Watts	
光束角度	130°	
正白光	CRI 70	3400 lm
暖白光	CRI 70	2400 lm



型號	F01-L90	
消耗功率	78 Watts	
光束角度	130°	
正白光	CRI 70	5100 lm
暖白光	CRI 70	3600 lm



型號	F01-L120	
消耗功率	104 Watts	
光束角度	130°	
正白光	CRI 70	6800 lm
暖白光	CRI 70	4800 lm

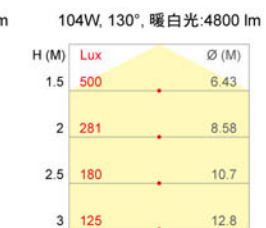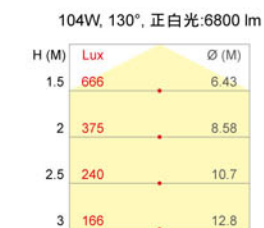

型號	F01-L150	
消耗功率	130 Watts	
光束角度	130°	
正白光	CRI 70	8500 lm
暖白光	CRI 70	6000 lm

