

SLHD125

天井燈規格書



The content of this technical document is subject to change without notice. Please contact Scientech Materials for further information.

Version: 0.1

Released Date: 2015/05/10

All rights are strictly reserved. Any portion of this document shall not be reproduced, copied, or transformed to any other forms without prior permission from Scientech Materials.

1. 產品特性 / Features

- Low power consumption and high efficacy.
- Excellent thermal dissipation structure.
- Lower weight for aloft installation.
- High color rendering index.
- RoHS compatible
- Supported Bluetooth BLE automatic dimming control (Optional)

2. 使用場地 / Applications

- Warehouse
- Factories
- Indoor stadium




3. 規格參數 / Technical data

電氣規格 / Electrical Specification	
輸入電壓 / Input Voltage	AC 100 – 240V
功率 / Power	120W ± 10%
功率因數 / Power Factor	> 0.9
功率效率 / Power Efficiency	> 90%
Optical Specification	
光通量 / Total Lumen (typical @ CRI 70)	5700k : 12000 Lm
光效率 / Efficacy (Lm/W)	100 Lm/w
色溫 / Color Temperature (CCT)	5700K ± 300K
演色性 / Color Rendering Index (CRI)	> 70
啟動時間 / Startup Time	< 500 ms
儲存環境溫度 / Storage Temperature	-40°C~80°C
使用環境溫度 / Operation Temperature	-10°C~50°C
保固期 / Warranty	兩年

4. 光學特性 / Optical characteristics

4.1 光譜圖 / Spectral Distribution (5700K)

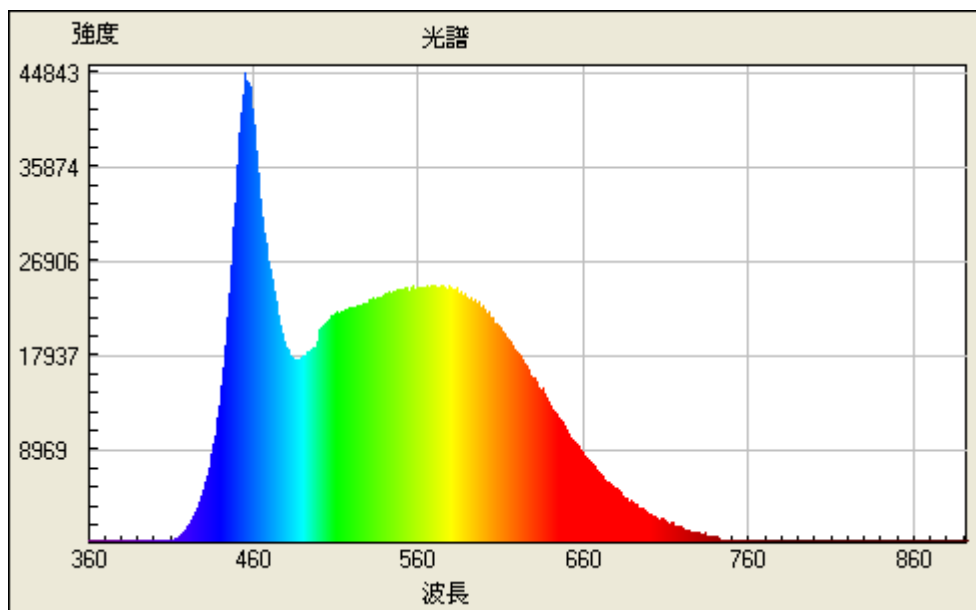

5. 產品型號 / Ordering information

Model	Power	CCT	Lumen	CRI	Efficacy	Angle
SLHD125-1131	120W	5700K	12000lm	>80	100lm/W	90°
SLHD125-1241	120W	5700K	12000lm	>80	100lm/W	120°

普晶材料股份有限公司
新竹縣湖口鄉新竹工業區中華路 16 號 5F
Tel : +886 3 597-7786 Ext:5360
Fax: +886 3 597-3988



連絡方式 / Contact Scientech Materials:

Headquarters

普晶材料股份有限公司
新竹縣湖口鄉新竹工業區中華路 16 號 5F
Tel : +886 3 597-7786 Ext:5360
Fax: +886 3 597-3988
Website: <http://www.scientech-m.com/>

Sales Services

E-mail: sales@Scientech-m.com